




A SOUND EXPERIENCE

The LX-7 is a stylish, high-performance passive loudspeaker, custom-built in Australia for screen sizes 75 inch and above. Featuring left, centre and right channels, it can be combined with surround speakers and an AVR/processor to create a genuine, immersive cinema soundscape without the need for virtual or 'bouncing' effects. The sleek design requires minimal space above or below your screen. The LX-7 is intended to be combined with a Krix subwoofer(s) to accurately reproduce the lowest frequencies for the very highest level of home cinema performance.

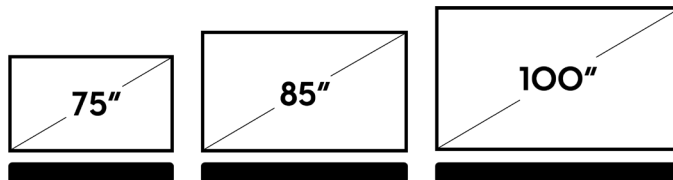

Sizes



Tilting bracket

Using the included bracket, the LX-7 can be mounted flush against the wall or at adjustable angles up to 15 degrees for optimal sound dispersion.



Tonally matched

The LX-7 is tonally matched to all Krix surround and overhead speakers.



Unparalleled sound

Three 90 x 90 Krix short throw waveguides significantly improve dispersion characteristics and increase efficiency for very high output levels.




Australian made

Krix has proudly engineered and manufactured speakers in Australia since 1974.



LX - 7 without grille

DIMENSIONS (85")

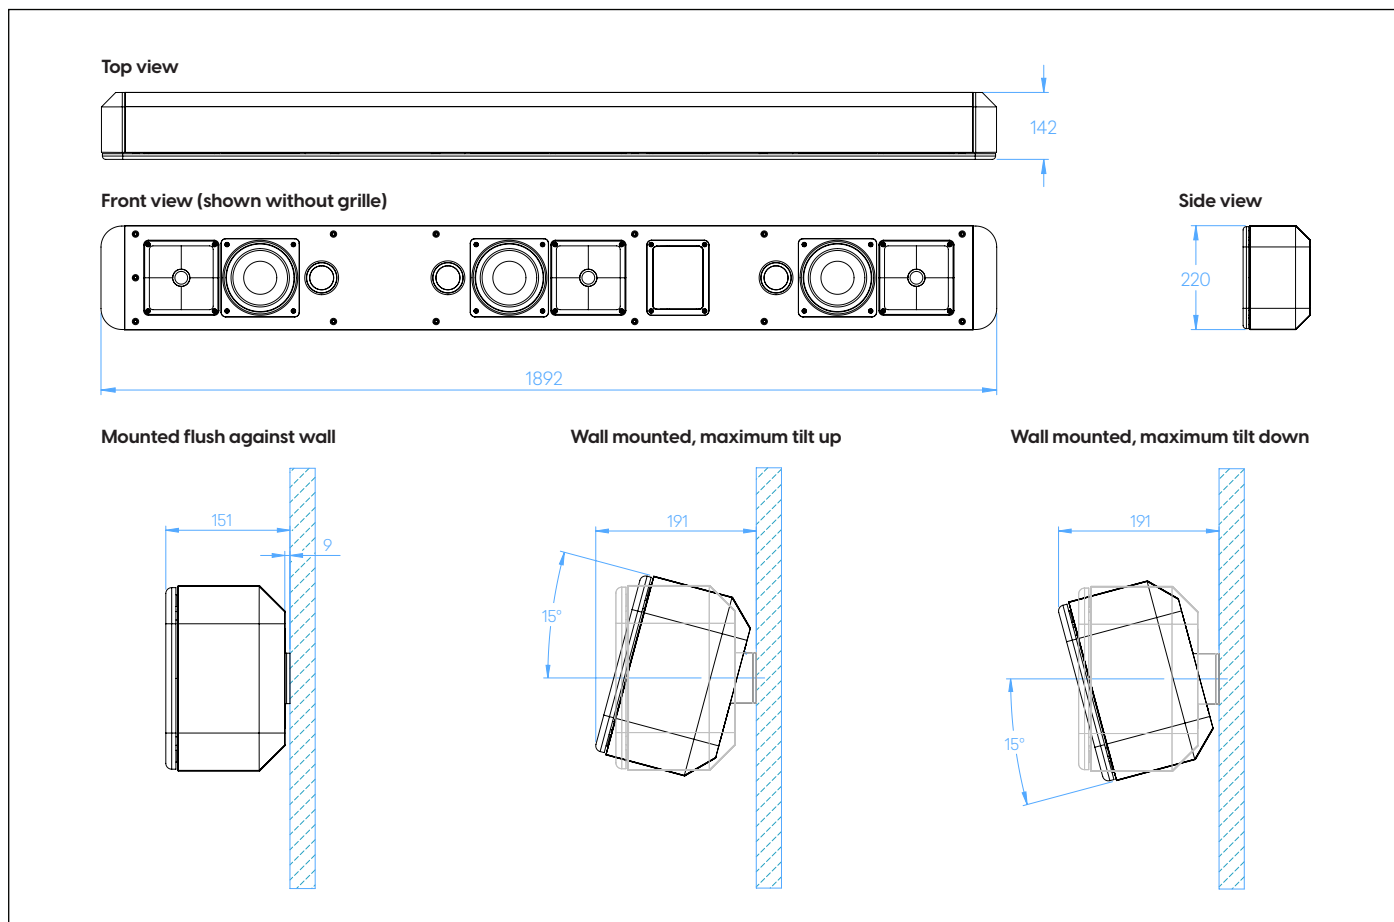

LX - 7

PERFORMANCE (PER CHANNEL)

| | |
|------------------------|------------------------------------------------|
| Frequency range | 60 Hz - 20 kHz (in room response) |
| Power handling | 50 - 250 Watts RMS recommended amplifier power |
| Sensitivity | 92 dB (2.83V / 1m) |
| Impedance | 8 Ohms |
| Configuration | 2-way |
| Crossover point | 19 kHz |

DRIVERS (PER CHANNEL)

| | |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Low frequency driver | Single 165mm (6 1/2") paper cone. 50mm (2") voice coil wound on high powered kapton former, with ventilated spider and aluminum flux stabilisation ring for low distortion. |
| High frequency driver | 26mm (1") doped fabric dome with large roll surround. Ferro fluid cooled. Coupled to a Krix designed 90 x 90 short throw waveguide. |

ENCLOSURE AND TERMINALS

| | |
|------------------------|------------------------------------------------------------------------|
| Enclosure type | Bass reflex, front vented |
| Input terminals | High current terminals featuring 5mm hole to accept up to 10 AWG cable |

DIMENSIONS / WEIGHT

| Model | Rec. TV sizes | Dimensions | Weight |
|-----------------|-------------------------------------------|-------------------------------------------------------------------------|---------|
| LX-7 75 | 75 to 84 | 220mm high x 1670mm wide x 142mm deep | 25kg |
| LX-7 85 | 85 to 97 | 220mm high x 1892mm wide x 142mm deep | 27kg |
| LX-7 100 | 98 to 115 | 220mm high x 2180mm wide x 142mm deep | 30kg |
| LX-7 CL | Width can be customised at time of order. | 220mm high x 1670 - 2260mm wide (contact your Krix dealer) x 142mm deep | 25-30kg |